


ZIF PCB MOUNT CONNECTORS

Features

- Zero insertion force design prevents damage to conductor during insertion and withdrawal.
- Double faced contact touches both sides of circuit.
- Built in cable retainer locks circuit by means of actuator.
- Low profile design.
(10mm-0.394 inch)

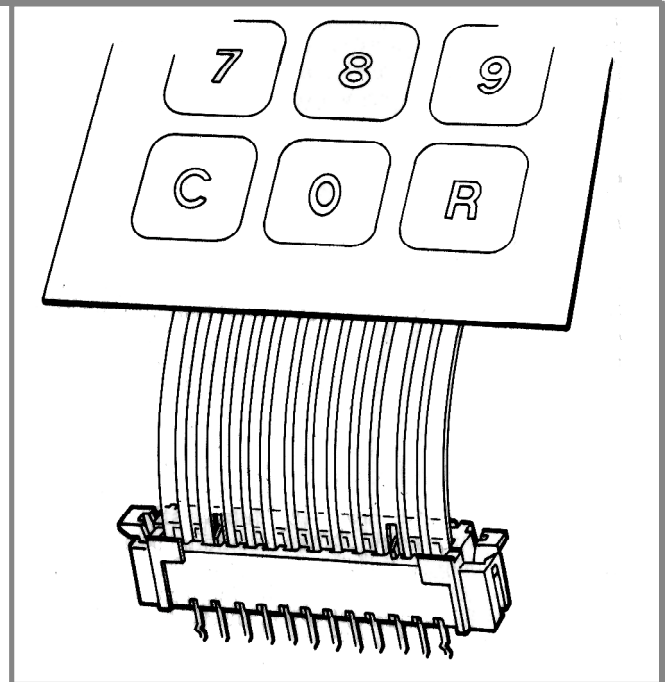

Technical Data

Insulation Resistance	1000 M Ω minimum
Temperature Range	-40°C to +85° C
Material	Phosphor bronze with Tin/lead contacts.
Current Rating	1 A max
Resistance	30 m Ω max. initially, rising to 50m Ω after repeated use.

